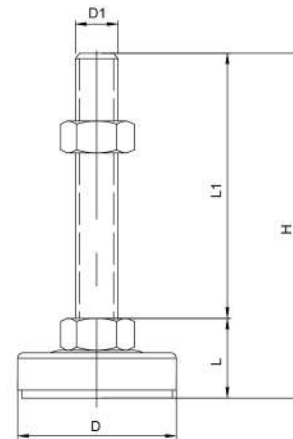



E004

Z004


*Rubber resistivity < 50KΩ.

*With Vibrating Finished surface, conductive rubber pad.

*Applicable for clean rooms, automatic equipment, conveying equipment, and aluminum extrusion equipment.

*English unit available, please contact us.

Item Number	Screw Material	Plate Diameter D mm	Plate High L mm	Screw Specification D1 mm	Screw Length L1 mm	Total High H mm	Load Capacity Kg		
E004-40-8-050	SUS304 Stainless	40	22	M8*P1.25	50	72	100		
E004-40-8-075			22	M8*P1.25	75	97	100		
E004-40-8-100			22	M8*P1.25	100	122	100		
E004-40-10-050			22	M10*P1.5	50	72	200		
E004-40-10-075			22	M10*P1.5	75	97	200		
E004-40-10-100			22	M10*P1.5	100	122	200		
E004-55-12-050		55	30	30	M12*P1.75	50	80	300	
E004-55-12-075				30	M12*P1.75	75	105	300	
E004-55-12-100				30	M12*P1.75	100	130	300	
E004-55-12-150				30	M12*P1.75	150	180	300	
E004-55-16-050				32	32	M16*P2.0	50	82	400
E004-55-16-075					32	M16*P2.0	75	107	400
E004-55-16-100			32		M16*P2.0	100	132	400	
E004-55-16-150			32		M16*P2.0	150	182	400	
E004-55-16-200			32		M16*P2.0	200	232	400	
E004-55-20-100			35		35	M20*P2.5	100	135	400
E004-55-20-150				M20*P2.5		150	185	400	
Z004-40-8-050			SS41 Zinc	40	21	M8*P1.25	50	71	100
Z004-40-8-075	21	M8*P1.25			75	96	100		
Z004-40-8-100	21	M8*P1.25			100	121	100		
Z004-40-10-050	22	M10*P1.5			50	72	200		
Z004-40-10-075	22	M10*P1.5			75	97	200		
Z004-40-10-100	22	M10*P1.5			100	122	200		
Z004-55-12-075	55	30		30	M12*P1.75	75	105	300	
Z004-55-12-100				30	M12*P1.75	100	130	300	
Z004-55-12-150				30	M12*P1.75	150	180	300	
Z004-55-16-100				32	32	M16*P2.0	100	132	400
Z004-55-16-150					32	M16*P2.0	150	182	400
Z004-55-20-100					35	35	M20*P2.5	100	135
Z004-55-20-150		M20*P2.5					150	185	400