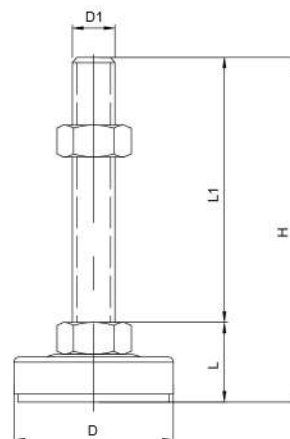



**E004**

**Z004**


\*Rubber resistivity < 50KΩ.

\*With Vibrating Finished surface, conductive rubber pad.

\*Applicable for clean rooms, automatic equipment, conveying equipment, and aluminum extrusion equipment.

\*English unit available, please contact us.

Item Number	Screw Material	Plate Diameter D mm	Plate High L mm	Screw Specification D1 mm	Screw Length L1 mm	Total High H mm	Load Capacity Kg
E004-60-5/8-100	SUS304 Stainless	60	36	5/8*11W	100	136	500
E004-60-5/8-150			36	5/8*11W	150	186	500
E004-90-20-100		90	48	M20*P2.5	100	148	700
E004-90-20-150			48	M20*P2.5	150	198	700
E004-90-20-200			48	M20*P2.5	200	248	700
E004-90-24-100			48	M24*P3.0	100	148	800
E004-90-24-125			48	M24*P3.0	125	173	800
E004-90-24-150			48	M24*P3.0	150	198	800
Z004-80-20-100	SS41 Zinc	80	33	M20*P2.5	100	133	500
Z004-80-20-150			33	M20*P2.5	150	183	500
Z004-90-20-100		90	49	M20*P2.5	100	149	700
Z004-90-20-150			49	M20*P2.5	150	199	700
Z004-90-20-200			49	M20*P2.5	200	249	700
Z004-90-24-100			48	M24*P3.0	100	148	800
Z004-90-24-125			48	M24*P3.0	125	173	800
Z004-90-24-150			48	M24*P3.0	150	198	800