




E004



Z004

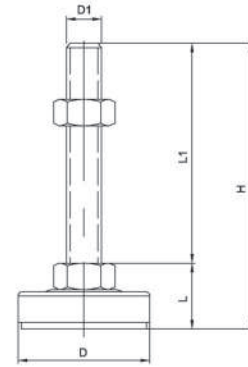


- *橡膠阻抗值 < 50KΩ。
- *外觀振動研磨處理，底部為導電橡膠。
- *適用在無塵室，自動化設備，輸送設備，鋁擠型設備。
- *此系列有英制規格，請來電洽詢。

產品型號 Part No.	螺絲材料 Screw Material	底盤直徑 D mm	底盤高度 L mm	螺絲規格 D1 mm	螺絲長度 L1 mm	總高 H mm	荷重 kg
E004-60-5/8-100	SUS304 Stainless	60	35	5/8*11W	100	135	500
E004-60-5/8-150			35	5/8*11W	150	185	500
E004-90-20-100		90	54	M20*P2.5	100	154	700
E004-90-20-150			54	M20*P2.5	150	204	700
E004-90-20-200			54	M20*P2.5	200	254	700
E004-90-24-100			57	M24*P3.0	100	157	800
E004-90-24-125			57	M24*P3.0	125	182	800
E004-90-24-150			57	M24*P3.0	150	207	800
Z004-80-20-100	SS41 Zinc	80	33	M20*P2.5	100	133	500
Z004-80-20-150			33	M20*P2.5	150	183	500
Z004-90-20-100		90	49	M20*P2.5	100	149	700
Z004-90-20-150			49	M20*P2.5	150	199	700
Z004-90-20-200			49	M20*P2.5	200	249	700
Z004-90-24-100			48	M24*P3.0	100	148	800
Z004-90-24-125			48	M24*P3.0	125	173	800
Z004-90-24-150			48	M24*P3.0	150	198	800

電著防滑腳架



B004



- *適用在自動化設備，輸送設備，工具機設備。

產品型號 Part No.	螺絲材料 Screw Material	底盤直徑 D mm	底盤高度 L mm	螺絲規格 D1 mm	螺絲長度 L1 mm	總高 H mm	荷重 kg
B004-55-12-075	SS41 ED	55	30	M12*P1.75	75	105	300
B004-55-12-100			30	M12*P1.75	100	130	300
B004-55-12-150			30	M12*P1.75	150	180	300
B004-55-16-100			32	M16*P2.0	100	132	400
B004-55-16-150			32	M16*P2.0	150	182	400