




E010



Z010

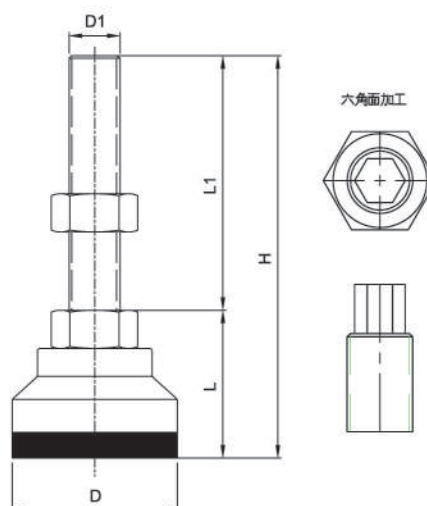

- \*橡膠阻抗值 < 50KΩ。
- \*底座為鋁合金一體成型。
- \*外觀拋光鍍鉻處理，導電性佳。
- \*適用在無塵室設備，鋁擠型設備，高載重機械設備。
- \*牙端可做六面加工。

產品型號 Part No.	螺絲材料 Screw Material	底座直徑 D mm	底座高度 L mm	螺絲規格 D1 mm	螺絲長度 L1 mm	總高 H mm	荷重 kg
E010-90-16-100	SUS304 Stainless	90	54	M16*P2.0	100	154	800
E010-90-16-150			54	M16*P2.0	150	204	800
E010-90-16-200			54	M16*P2.0	200	254	800
E010-90-20-100			58	M20*P2.5	100	158	950
E010-90-20-150			58	M20*P2.5	150	208	950
E010-90-20-200			58	M20*P2.5	200	258	950
Z010-90-16-100	SS41 Zinc	90	52	M16*P2.0	100	152	800
Z010-90-16-150			52	M16*P2.0	150	202	800
Z010-90-16-200			52	M16*P2.0	200	252	800
Z010-90-20-100			53	M20*P2.5	100	153	950
Z010-90-20-150			53	M20*P2.5	150	203	950
Z010-90-20-200			53	M20*P2.5	200	253	950
Z010-90-24-100			60	M24*P3.0	100	160	1100
Z010-90-24-150			60	M24*P3.0	150	210	1100
Z010-90-24-200			60	M24*P3.0	200	260	1100
Z010-90-30-110			62	M30*P3.5	110	172	1100
Z010-90-30-150			62	M30*P3.5	150	212	1100
Z010-120-20-100			120	50	M20*P2.5	100	150
Z010-120-20-150		50		M20*P2.5	150	200	1000
Z010-120-20-200		50		M20*P2.5	200	250	1000
Z010-120-24-100		57		M24*P3.0	100	157	1100
Z010-120-24-150		57		M24*P3.0	150	207	1100
Z010-120-24-200		57		M24*P3.0	200	257	1100
Z010-120-30-110		59		M30*P3.5	110	169	1200
Z010-120-30-150		59		M30*P3.5	150	209	1200
Z010-120-36-100		59		M36*P4.0	100	159	1200
Z010-120-36-150		59		M36*P4.0	150	209	1200