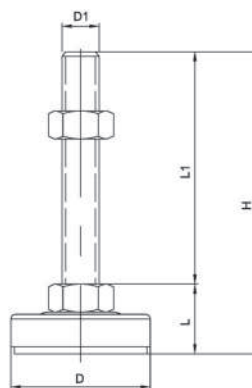



E004

Z004


*橡膠阻抗值 < 50KΩ。

*外觀振動研磨處理，底部為導電橡膠。

*適用在無塵室，自動化設備，輸送設備，鋁擠型設備。

*此系列有英制規格，請來電洽詢。

產品型號 Part No.	螺絲材料 Screw Material	底盤直徑 D mm	底盤高度 L mm	螺絲規格 D1 mm	螺絲長度 L1 mm	總高 H mm	荷重 kg			
E004-40-8-050	SUS304 Stainless	40	19	M8*P1.25	50	69	100			
E004-40-8-075			19	M8*P1.25	75	94	100			
E004-40-8-100			19	M8*P1.25	100	119	100			
E004-40-10-050			22	M10*P1.5	50	72	200			
E004-40-10-075			22	M10*P1.5	75	97	200			
E004-40-10-100			22	M10*P1.5	100	122	200			
E004-55-12-050		55	55	30	M12*P1.75	50	80	300		
E004-55-12-075				30	M12*P1.75	75	105	300		
E004-55-12-100				30	M12*P1.75	100	130	300		
E004-55-12-150				30	M12*P1.75	150	180	300		
E004-55-16-050				32	M16*P2.0	50	82	400		
E004-55-16-075				32	M16*P2.0	75	107	400		
E004-55-16-100				32	M16*P2.0	100	132	400		
E004-55-16-150				32	M16*P2.0	150	182	400		
E004-55-16-200				32	M16*P2.0	200	232	400		
E004-55-20-100				35	M20*P2.5	100	135	400		
E004-55-20-150				35	M20*P2.5	150	185	400		
Z004-40-8-050				SS41 Zinc	40	21	M8*P1.25	50	71	100
Z004-40-8-075						21	M8*P1.25	75	96	100
Z004-40-8-100						21	M8*P1.25	100	121	100
Z004-40-10-050	22	M10*P1.5	50			72	200			
Z004-40-10-075	22	M10*P1.5	75			97	200			
Z004-40-10-100	22	M10*P1.5	100			122	200			
Z004-55-12-075	55	55	30		M12*P1.75	75	105	300		
Z004-55-12-100			30		M12*P1.75	100	130	300		
Z004-55-12-150			30		M12*P1.75	150	180	300		
Z004-55-16-100			32		M16*P2.0	100	132	400		
Z004-55-16-150			32		M16*P2.0	150	182	400		
Z004-55-20-100			35		M20*P2.5	100	135	400		
Z004-55-20-150			35		M20*P2.5	150	185	400		