




E010



Z010

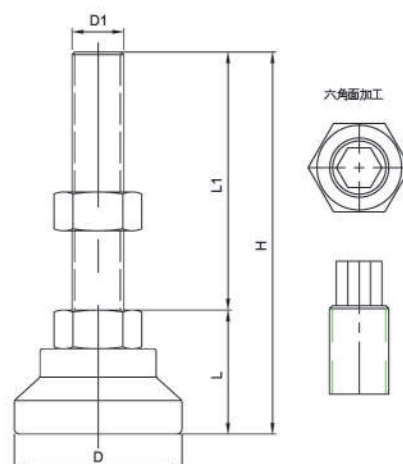

- \*橡膠阻抗值 < 50KΩ。
- \*底座為鋁合金一體成型。
- \*外觀拋光鍍鉻處理，導電性佳。
- \*適用在無塵室設備，鋁擠型設備，高載重機械設備。
- \*牙端可做六面加工。

產品型號 Part No.	螺絲材料 Screw Material	底盤直徑 D mm	底盤高度 L mm	螺絲規格 D1 mm	螺絲長度 L1 mm	總高 H mm	荷重 kg				
E010-65-16-100	SUS304 Stainless	65	55	M16*P2.0	100	155	600				
E010-65-16-150			55	M16*P2.0	150	205	600				
E010-65-16-200			55	M16*P2.0	200	255	600				
E010-65-20-100			58	M20*P2.5	100	158	750				
E010-65-20-150			58	M20*P2.5	150	208	750				
E010-65-20-200			58	M20*P2.5	200	258	750				
E010-100-16-100		SS41 Zinc	100	51	M16*P2.0	100	151	800			
E010-100-16-150				51	M16*P2.0	150	201	800			
E010-100-16-200				51	M16*P2.0	200	251	800			
E010-100-20-100				55	M20*P2.5	100	155	950			
E010-100-20-150				55	M20*P2.5	150	205	950			
E010-100-20-200				55	M20*P2.5	200	255	950			
Z010-65-16-100	SS41 Zinc		65	52	M16*P2.0	100	152	600			
Z010-65-16-150				52	M16*P2.0	150	202	600			
Z010-65-16-200				52	M16*P2.0	200	252	600			
Z010-65-20-100				53	M20*P2.5	100	153	750			
Z010-65-20-150				53	M20*P2.5	150	203	750			
Z010-65-20-200				53	M20*P2.5	200	253	750			
Z010-100-16-100		100	48	48	M16*P2.0	100	148	800			
Z010-100-16-150				48	M16*P2.0	150	198	800			
Z010-100-16-200				48	M16*P2.0	200	248	800			
Z010-100-20-100				50	M20*P2.5	100	150	950			
Z010-100-20-150				50	M20*P2.5	150	200	950			
Z010-100-20-200				50	M20*P2.5	200	250	950			
Z010-100-24-100			57	57	57	M24*P3.0	100	157	1100		
Z010-100-24-150					57	M24*P3.0	150	207	1100		
Z010-100-24-200					57	M24*P3.0	200	257	1100		
Z010-100-30-110					58	58	58	M30*P3.5	110	168	1100
Z010-100-30-150							58	M30*P3.5	150	208	1100